

QDLASER

QLD0593-xxxx Series

Compact Visible Laser Module

Preliminary

C00109-04 February 2017



1. DESCRIPTION

The QLD0593 is a visible laser module based on the frequency doubling of NIR distributed feedback (DFB) laser. The laser is assembled into a compact flat package.

2. FEATURES

- 532, 561, and 594nm light source
- 5, 20, 30, 50mW optical output power
- Low power consumption
- Low intensity noise
- Narrow spectral linewidth
- DC~100MHz modulation and short pulse capable
- Small size <0.5cc (5.6 x 3.8 x 22 mm)



3. APPLICATIONS

- Spectroscopy
- Fluorescence microscope
- Time resolved measurement
- Interferometry

4. ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
DFB forward current	I_{DFB}	250	mA
DFB forward voltage	V_{DFB}	2.5	V
DFB reverse voltage	V_{rDFB}	2	V
SOA forward current	I_{SOA}	320	mA
SOA forward voltage	V_{fSOA}	3	V
SOA reverse voltage	V_{rSOA}	2	V
Output power	QLD0593-xx50	60	mW
	QLD0593-xx30	40	
	QLD0593-xx20	30	
	QLD0593-xx05	10	
Heater power	P_{ht}	0.3	W
Module Operating Temperature	T_{op}	20 to 30	°C
Storage Temperature	T_{st}	-10 to 50	°C
Module Cure Temperature (<60min)(*1)	T_{mdl}	80	°C

(*1) Specification for discrete module when fixing the module on a heat sink with epoxy

5. OPTICAL AND ELECTRICAL CHARACTERISTICS

(T_C = 25°C, unless otherwise specified)

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT	
DFB operation current	I _{opDFB}	CW, P _o = P _{op}	-	120	220	mA	
DFB operation voltage	V _{opDFB}	CW, P _o = P _{op}	-	1.8	2.4	V	
SOA operation current	I _{opSOA}	CW, P _o = P _{op}	-	250	320	mA	
SOA operation voltage	V _{opSOA}	CW, P _o = P _{op}	-	2.0	3.0	V	
Heater current	I _{heater}	-	0	-	90	mA	
Heater resistance	R _{heater}	-	-	30	-	Ω	
Output power	QLD0593-xx50	P _o	CW	50	-	-	mW
	QLD0593-xx30			30	-	-	
	QLD0593-xx20			20	-	-	
	QLD0593-xx05			5	-	-	
Power consumption	P _c	CW, P _o = P _{op}	-	0.8	-	W	
Peak wavelength	QLD0593-32xx	λ _p (*2)	CW, P _o = P _{op}	530	532	534	nm
	QLD0593-61xx			559	561	563	nm
	QLD0593-94xx			592	594	596	nm
Output beam quality	M2	CW, P _o = P _{op}	-	1.2	-	-	
Beam divergence (FWHM)	θ _⊥	CW, P _o = P _{op}	-	10	-	deg.	
	θ _∥	CW, P _o = P _{op}	-	5	-	deg.	
Polarization ratio (*3)	-	CW, P _o = P _{op}		30		dB	
Thermistor Resistance	R _{th}	T _C = 25°C, B=3375K	9.5	10	10.5	kΩ	

(*2) Peak wavelength tolerance of +/- 1nm is available as an option.

(*3) Polarization direction is parallel to the module surface

6. PRODUCT PART NUMBER

(1) Peak wavelength and output power


Part Number	Peak Wavelength	Output Power
QLD0593-3220	532nm	20mW
QLD0593-3230		30mW
QLD0593-6105	561nm	5mW
QLD0593-6120		20mW
QLD0593-6130		30mW
QLD0593-6150		50mW
QLD0593-9405	594nm	5mW
QLD0593-9420		20mW

(2) Module structure

Part Number	Specification
QLD0593-xxxx	Discrete module
QLD0593-xxxx-11	with mounting plate option

7. OUTLINE DRAWING


(1) QLD0593-xxxx-11 (with mounting plate option)

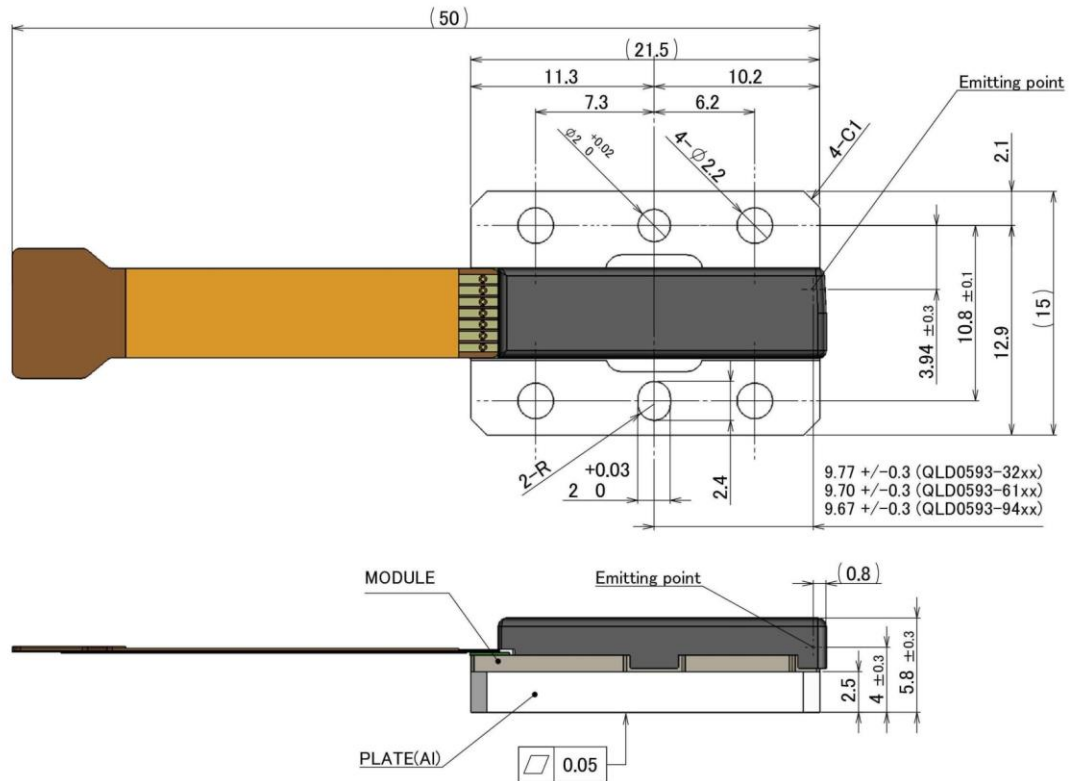

Notes

1. All dimensions in millimeters
2. Unless otherwise specified, Tolerance $\pm 0.2\text{mm}$
3. Recommended FPC-connector, JST 07FM-1.0


(2) QLD0593-xxxx (Discrete module)

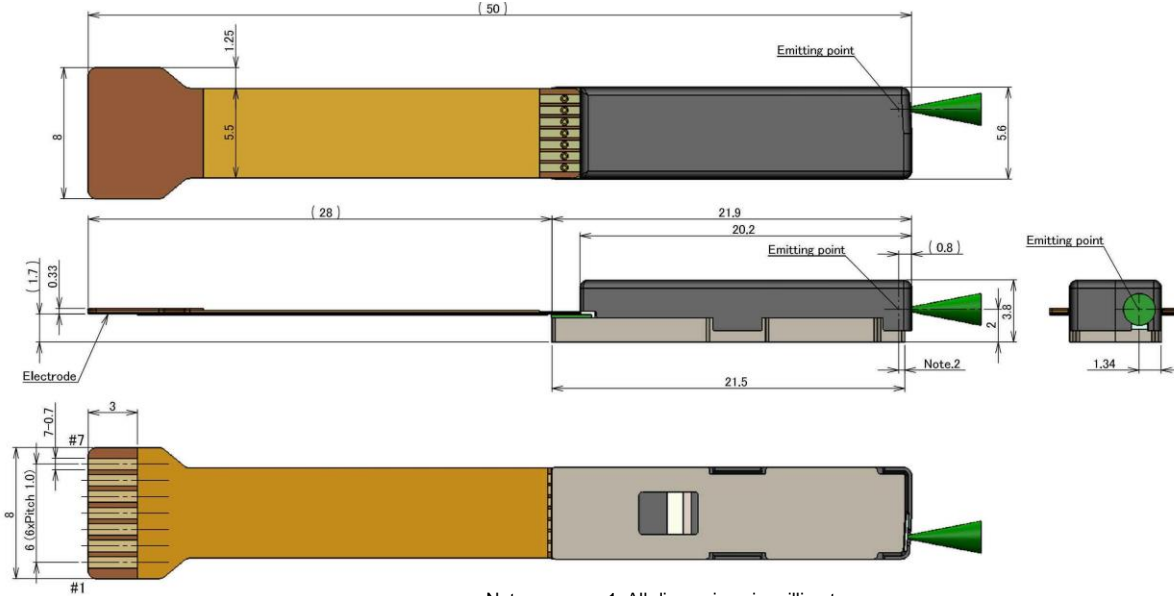

- Notes.
1. All dimensions in millimeters.
 2. Emitting point,
 - 32xx(532nm): 0.43±0.3, -61xx(561nm): 0.50±0.3, -94xx(594nm): 0.53±0.3
 3. Unless otherwise specified, Tolerance ±0.2mm
 4. Recommended connector for FPC: JST 07FM-1.0


8. PIN CONFIGURATION

No.	Description
1	Heater (+)
2	Common Cathode / Heater (-)
3	DFB Anode
4	Spacer Anode
5	SOA Anode
6	Thermistor (+)
7	Thermistor (-)


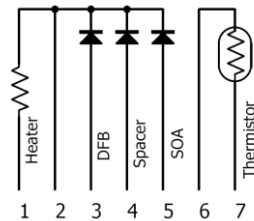


9. TYPICAL OPERATING CHARACTERISTICS

Example data from QLD0593-6150 under CW operation at module temperature of 25°C

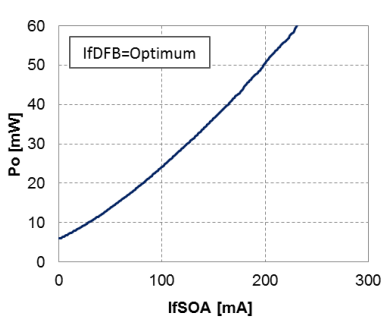

(a) Light output characteristics depending on If SOA and If DFB

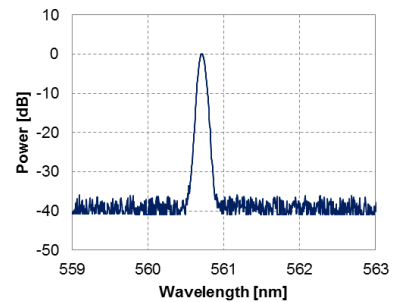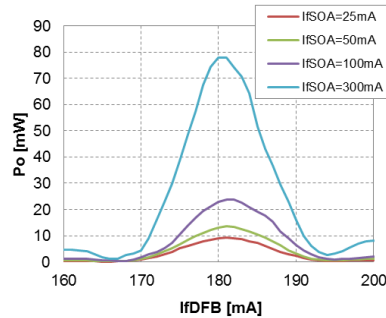

(b) Spectral characteristics

10. RECOMMENDED METHOD OF FIXATION

- (1) QLD0593-xxxx-11 (with mounting plate option)

Apply 4-#2 or M2 screw with each torque of <0.1N.m.

- (2) QLD0593-xxxx (Discrete module)

UV curable epoxy or heat curable epoxy are applicable to fix the module onto a heat sink.
Please contact QD Laser for further information.

11. OPTICAL POWER ADJUSTMENT PROCEDURE

With measuring optical power,

- (1) Adjust DFB (and Heater) current so that the optical power becomes the maximum.
- (2) Adjust SOA current to obtain the required power within the maximum rating.
- (3) If needed, repeat the procedure of (1) to (2).

12. NOTICE

- Safety Information


This product is classified as Class 3B laser product, and complies with 21 CFR Part 1040.10.
Please do not take a look at laser lighting in operations since laser devices may cause troubles to human eyes.
Please do not eat, burn, break and make chemical process of the products since they contain GaAs material.

- Handling products

Semiconductor lasers are easily damaged by external stress such as excess temperature and ESD.
Please pay attention to handling products, and use within range of maximum ratings.
QD Laser takes no responsibility for any failure or unusual operation resulting from improper handling, or unusual physical or electrical stress.

- RoHS

This product conforms to RoHS compliance related EU Directive 2011/95/EC.

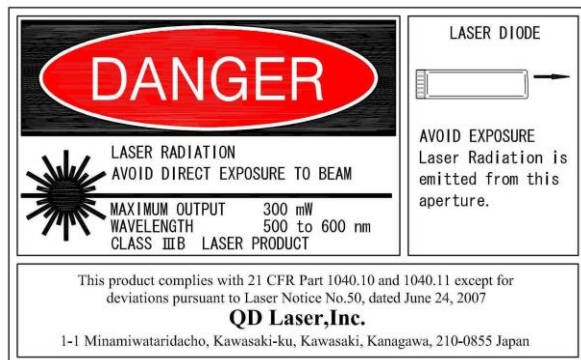

QD Laser, Inc.

Contact : info@qdlaser.com <http://www.qdlaser.com>

Copyright 2013-2017 All Rights Reserved by QD Laser, Inc.

Keihin Bldg. 1F 1-1 Minamiwatarida-cho, Kawasaki-ku, Kawasaki, Kanagawa Zip 210-0855 Japan

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this data sheet is accurate at time of publication and is subject to change without advance notice.